Installation manual

Pavilion LOUISIANNA

Diameter Ø 303 cm

Log thickness 34 mm





The producer shall have the right to make technical changes to the product

Technische Änderungen vorbehalten

Le producteur réserve le droit d'effectuer des modifications techniques au produit

Il produttore mantiene il diritto di apportare modifiche tecniche al prodotto

Reservado el derecho a modificaciones técnicas

Valmistaja pidättää oikeuden tehdä tuotteeseen teknisiä muutoksia

Tillverkaren har rätt att utföra tekniska förändringar för produkten

1 General information



We are glad that you have decided in favour of our garden house!

Please read the assembly manual carefully before proceeding with the house installation! You will thus avoid problems and will not waste time.

Recommendations:

- Keep the house package until its complete assembly in a dry place, but not in direct contact with the ground, protected from weather conditions (moisture, the sun, etc.). Do not keep the house package in a heated room!
- When selecting the garden house location, make sure that the house will not be subjected to extreme weather conditions (areas of strong snowfall or winds); otherwise you should attach the house (for instance, with anchors) to the subsoil.



Your house is made from high quality fir and delivered in the natural (unprocessed) form. If, despite our thorough inspection, you should have complaints, please submit the filled out control sheet and purchase invoice to the product seller.

ATTENTION: Please be sure to keep the documentation accompanying the house package! The control sheet includes the control number of the house. We can only review complaints if you submit the control number of the house to the seller!

The warranty does not cover:

- Peculiarities of wood as a natural material
- > Wooden details already painted (processed with a wood preservative)
- > Wooden details containing whole branches that do not endanger the stability of the house
- > Colour tone variations caused by wood structure differences that do not influence wood lifetime
- Wooden details containing (caused by drying) small cracks/gaps that do not pass through and do not influence the structure of the house
- > Twisted wooden details if they can nevertheless be installed
- Roof and floor boards that may have on their concealed surfaces some non-planed areas, colour differences and waning
- Complaints resulting from an incompetent manner of the installation of the house or the house subsiding due to an incompetently made foundation
- Complaints caused by introducing self-initiative changes to the house, such as the deformation of wooden details and doors/windows due to an incompetent manner of wood processing; the attachment of storm braces too rigidly, doorframes being screwed onto wall logs, etc.

The complaints covered by the warranty are satisfied to the extent of replacing the deficient/faulty material. All other demands will be excluded!



Garden house painting and maintenance

Wood is a natural material, growing and adapting depending on weather conditions. Large and small cracks, colour tone differences and changes, as well as a changing structure of wood are not errors, but a result of wood growing and a peculiarity of wood as a natural material.

Unprocessed wood (except for foundation joists) becomes greyish after having been left untouched for a while, and can be turn blue and become mouldy. To protect the wooden details of your garden house, you must immediately process them with a wood preservative.

We recommend that you cover the floor boards in advance with a colourless wood impregnation agent, especially the bottom sides of the boards, to which you will no longer have access when the house is assembled. Only this will prevent moisture penetration.

We definitely recommend that you also process the doors and windows with a wood impregnation agent, and do that namely both inside and outside! Otherwise the doors and windows can become twisted.

After the house assembly is completed, we recommend for the conclusive finishing a weather protection paint that will protect wood from moisture and UV radiation.


When painting, use high quality tools and paints, follow the paint application manual and manufacturer's safety and usage instructions. Never paint a surface in strong sunlight or rainy weather. Consult a specialist regarding paints suitable for unprocessed softwood and follow the paint manufacturer's instructions.

Having been properly painted, your garden house's lifetime will increase substantially. We recommend that you inspect the house thoroughly once every six months.

2 Preparation for assembly

Tools and preparation of components

To assemble the garden house, you will need the following tools:

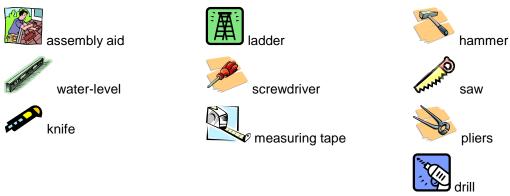

ADVICE: To avoid splinters, we recommend that you wear the corresponding protective gloves during the assembly process.



We wish you total success with the garden house installation and much joy with this house for many years to come!

Pos	SPECIFICATION-STÜCKLISTE-NOMENCLATURE-ELEMENTI-ESPECIFICATIÓN "PAJ34-3636FSC"	Pcs	Profile (mm)	Length (mm)
001		3	34x55	1950
002		17	34x114	350
003		17	34x114	350
004		68	34x114	1950
005	1950 Without tonque	3	34x114	1950
006		2	34x114	1950
007		22	34x114	470
008		22	34x114	470
009		2	34x114	1950
010		3	34x55	1950
AR1	Foundation- Fundament- Fondation- Fondazione- Vigas de cimentación 2x60°	6	45x70	1744
AR2	Foundation- Fundament- Fondation- Fondazione- Vigas de cimentación 2x60°	2	45x70	2345
AR3	Foundation- Fundament- Fondation- Fondazione- Vigas de cimentación 2x60°	2	45x70	3026
060	Floor board- Fussbodenbrett- Madrier du plancher - Tavola pavimento- Tabla de suelo			
061	2×90°	19	19x89	2951
062	2x30°	2	19x89	2951
063	2×30°	2	19x89	2641
064	2x30°	2	19x89	2331
065	2x30°	2	19x89	2021
066	2x30°	2	19x89	1711
067	2x30°	2	19x89	1401
068	2x30°	2	19x89	1091
069	2x30°	2	19x89	781
0610	2x30°	2	19x89	471
0611	2x30°	2	19x46	161

Pos	SPECIFICATION-STÜCKLISTE-NOMENCLATURE-ELEMENTI-ESPECIFICATIÓN "PAJ34-3636FSC"	Pcs	Profile (mm)	Length (mm)
150	Joining detail- Verbindungsteil- Détail de connection- Dettaglio di collegamento- Detalle de juntura	3	8x16	1200
100		6	19x95	2243
151		6	44x120	1849
130	Floor beading- Fussbodenleiste- Baguette du 🕅 🕅 🕅	6	19x19	1800
140	Storm brace- Sturmleiste- Protection contre le	6	25x45	2220
	Fixing kit- Befestigungsset- Moyens de fixation-	1		
F1	Cylinder- Zylinderschloss- Serrure a mortaiser-	1		1
F2	Door fittings- Türbeschlag- Ferrure- Ferramenta porta- Manilla puerta- QULlink jakate	1		
F3	Window fittings- Fenstergriff- Poigne de la Image: Construction of the second	4		1
F4	Screw- Schraube- Vis- Vite- Tornillo- 2.5x16mm	4		
F5	Screw- Schraube- Vis- Vite- Tornillo- 3x20mm 🗕 🛏	48		
F6	Screw- Schraube- Vis- Vite- Tornillo- 3x20mm	4		-
F7	Screw- Schraube- Vis- Vite- Tornillo- 4.5x50mm	34		<u> </u>
F8	Screw- Schraube- Vis- Vite- Tornillo- 4.5x70mm	8		<u> </u>
F9	Screw- Schraube- Vis- Vite- Tornillo- 5x90mm	96		
F10	Screw- Schraube- Vis- Vite- Tornillo- 6x120mm	32		
F11	Nail- Nagel- Clou- Chiodo- Clavo- 1.4x40mm	30		
F12	Nail- Nagel- Clou- Chiodo- Clavo- 2.5x50mm	300		
F13	Window stop- Fensterfeststelle- Crémaillere-	4		1
F14	Roof cap- Dachkappe- Finition métallique- Finitura di tetto- Caballete de tejado	1		1
F15	Nut- Schraubenmutter- Écrou- Dado- Tuerca-	12		1
F16	Bolt -Schloss-schraube -Boulon- Bullone- Perno-	12		1
F17	Washer- Dichtscheibe- Joint- Rondella- Arandela-	12		1
F18	Keeper- Schliessblech- Tole- Lamiera- Aldaba de	2		+
F19	Hook- Haken- Crochet- Ganzio- Pestillo QHaak150mmZn	2		<u> </u>

Pos	SPECIFICATION-STÜCKLISTE-NOMENCLATURE-ELEMENTI-ESPECIFICATIÓN "PAJ34-3636FSC"	Pcs	Profile (mm)	Length (mm)
EL-1	Roof element- Dachelement- Panneau de toit- Elemento di tetto- Elemento tejado	6	61×1106	2233
EL-2	Roof element- Dachelement- Panneau de toit- Elemento di tetto- Elemento tejado	6	61x1106	2233
TU34-30R TA34-19R	Door – Tür – Porte – Porta–Puerta 1244x1896 Window – Fenster – Fenetre – Finestra–Ventana 1003x1336	1 2		
Sla8-1	Slat- Leiste- Baguette- Listello- Listón	1	19x35	1250

